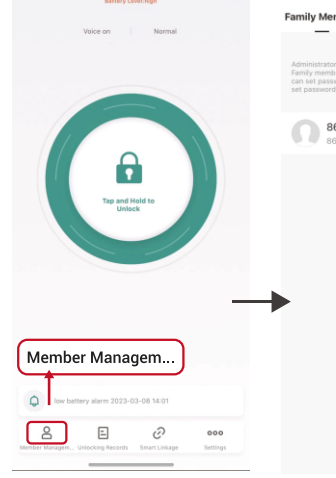
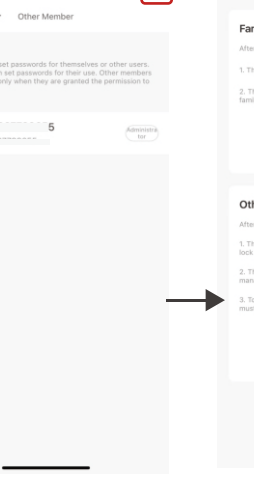
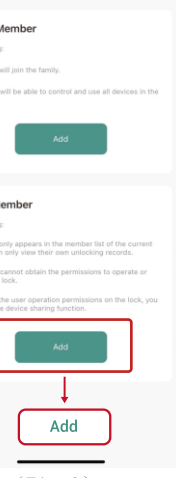

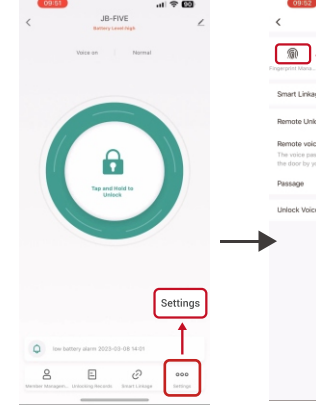
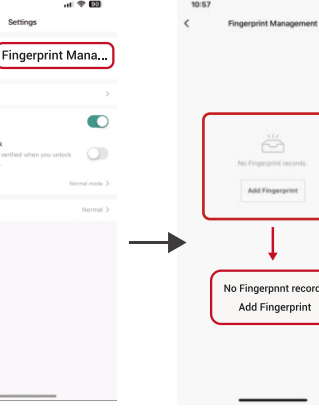
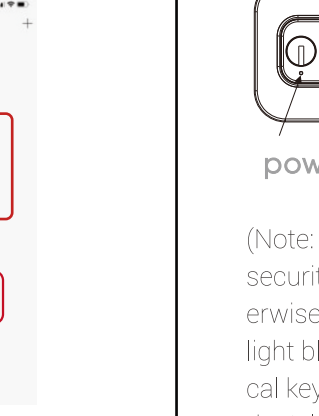
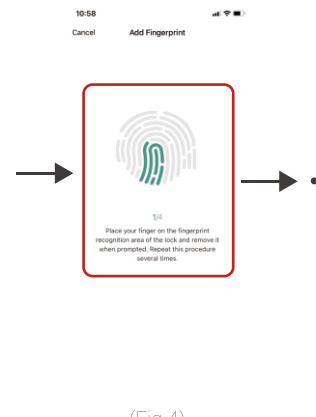
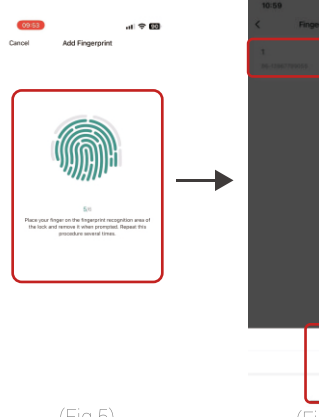
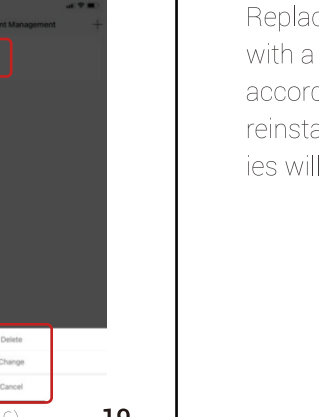
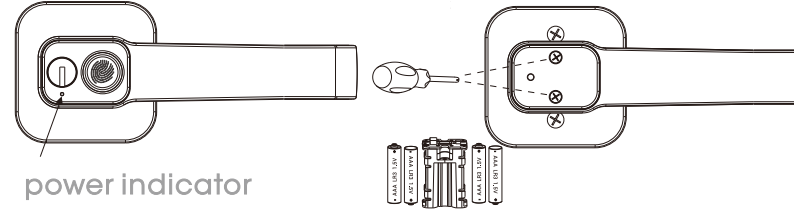
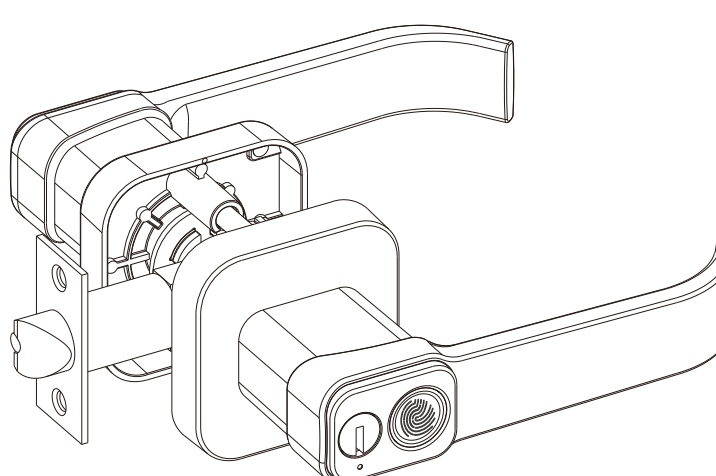
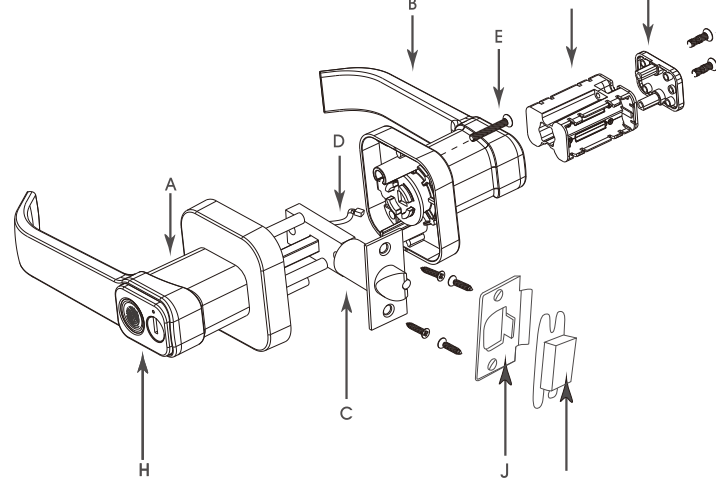




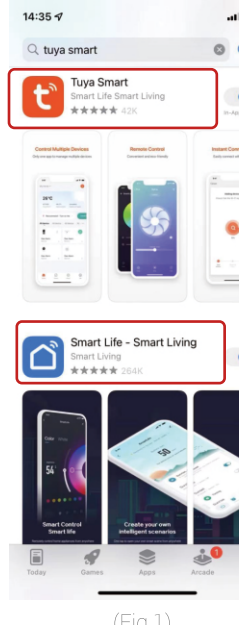
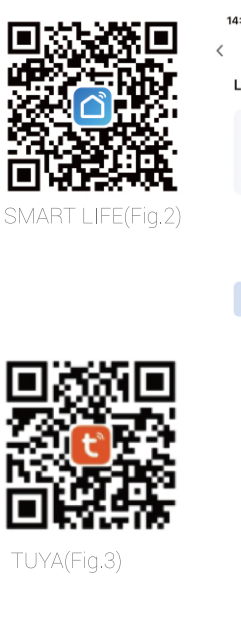
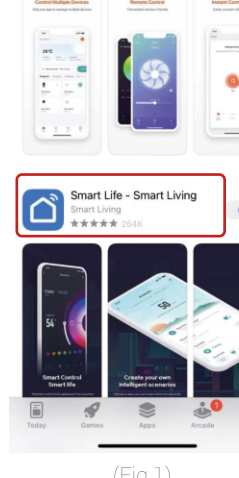
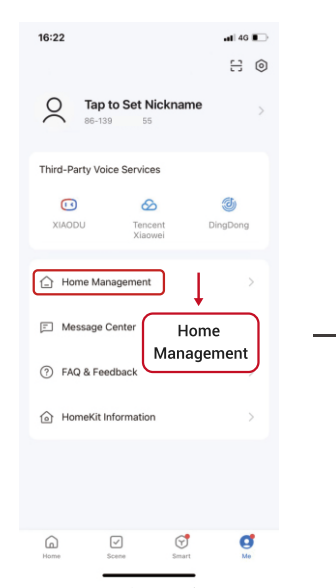
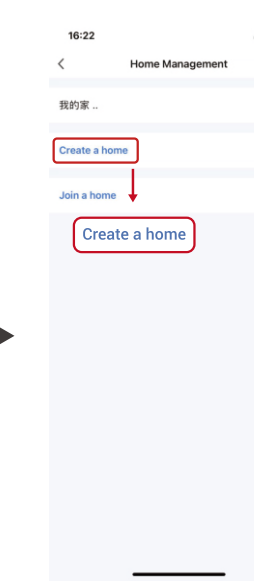
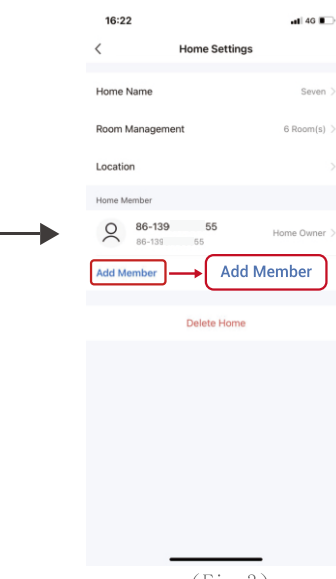
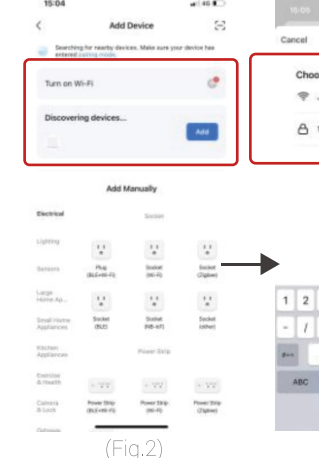
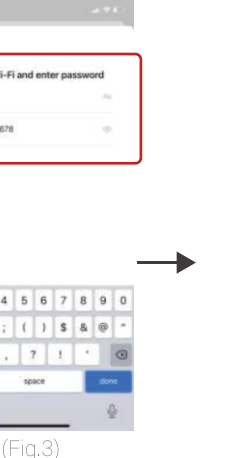
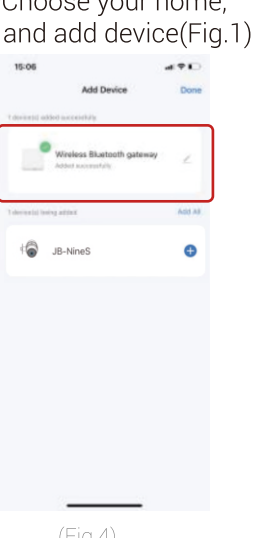
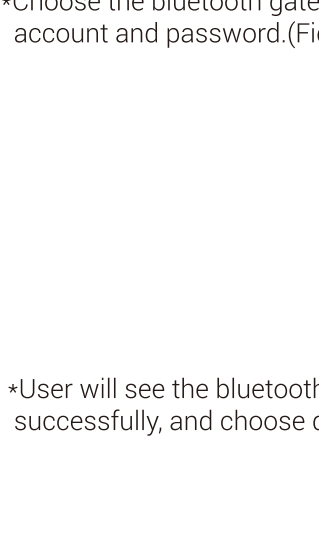
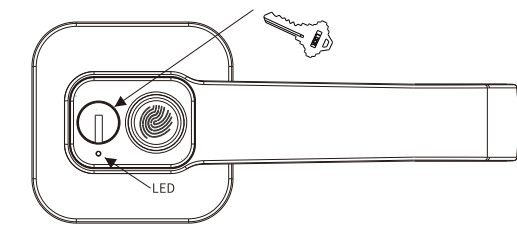
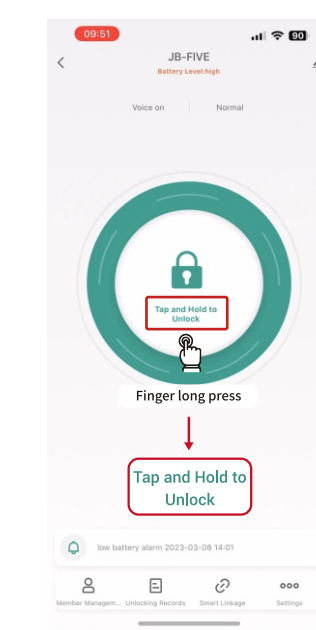
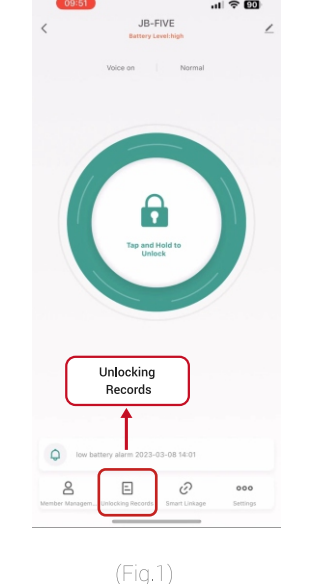
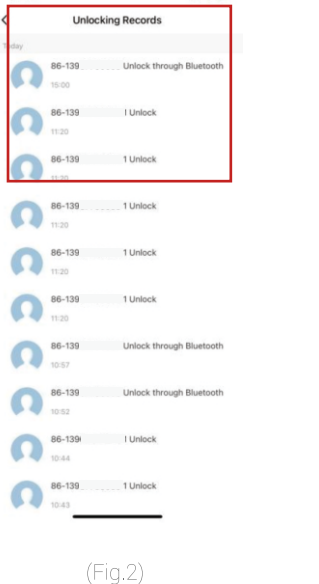




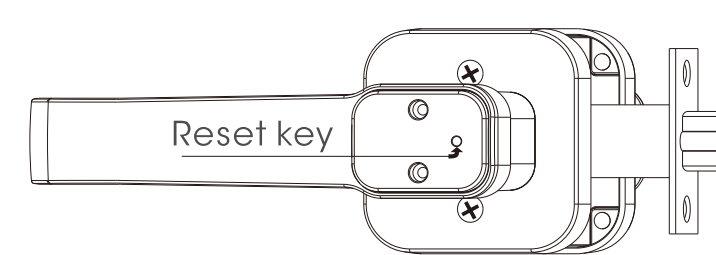
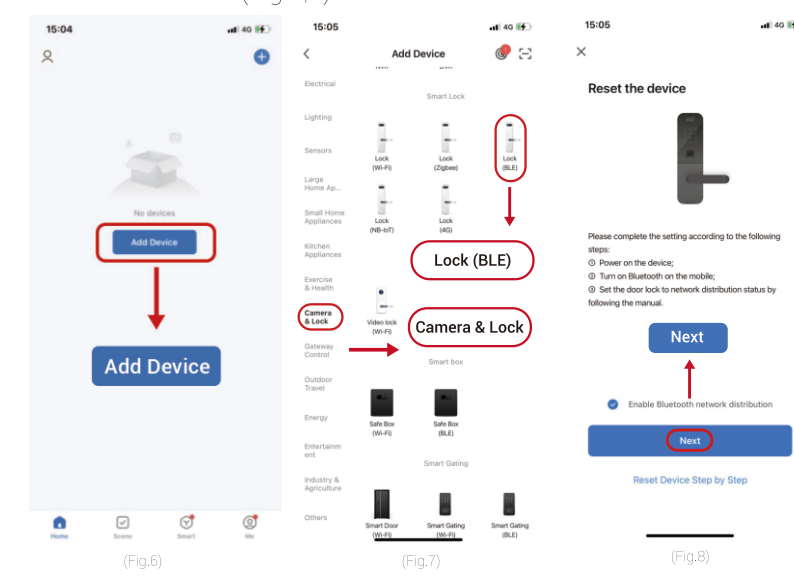
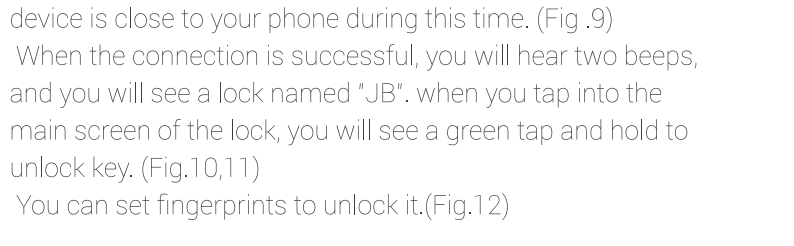
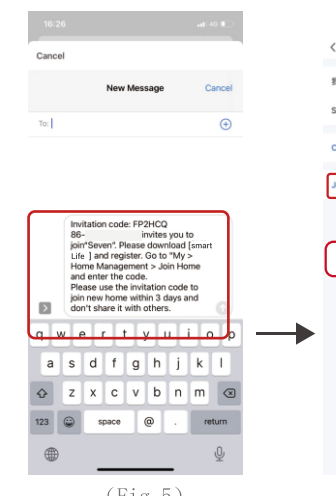
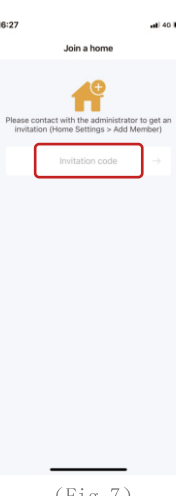
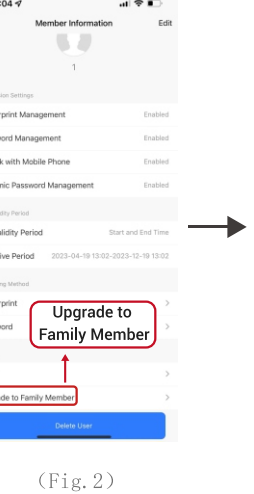
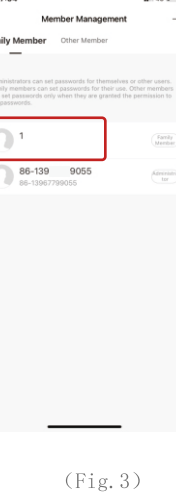
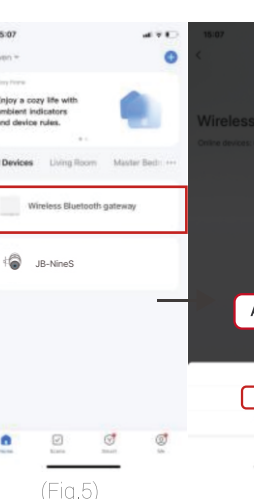
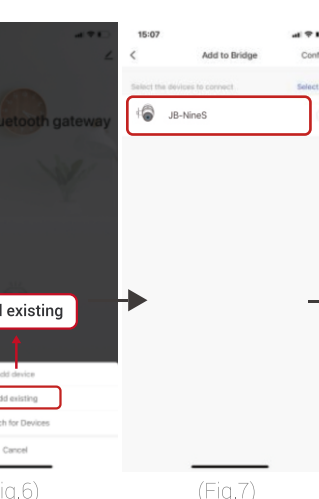
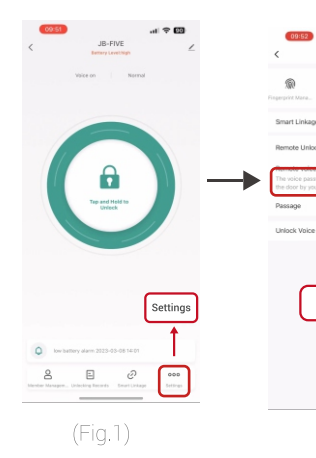
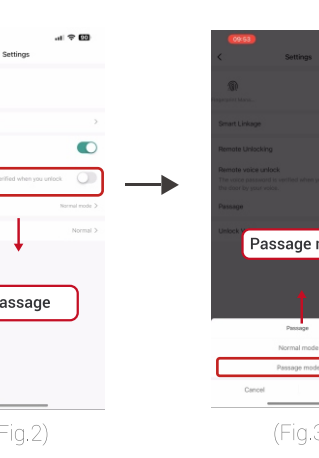
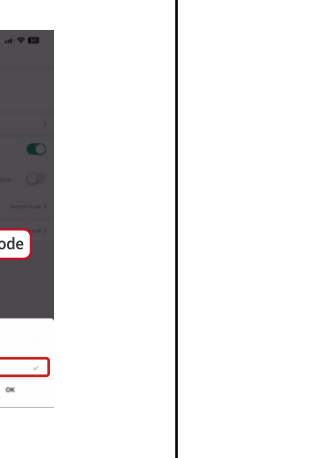
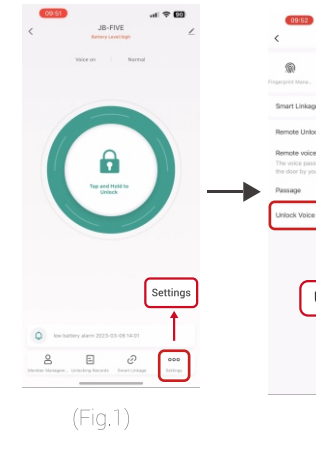
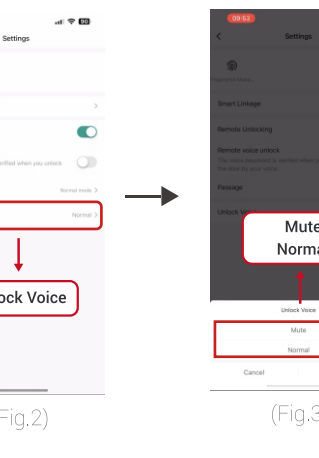
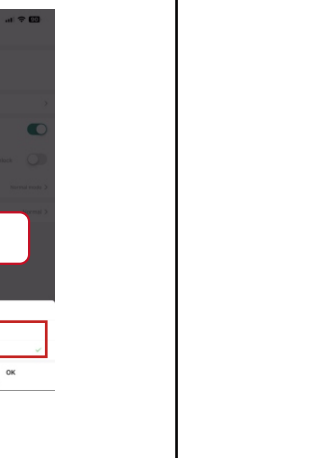
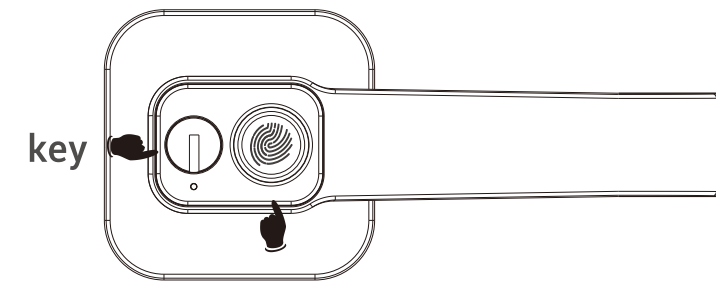




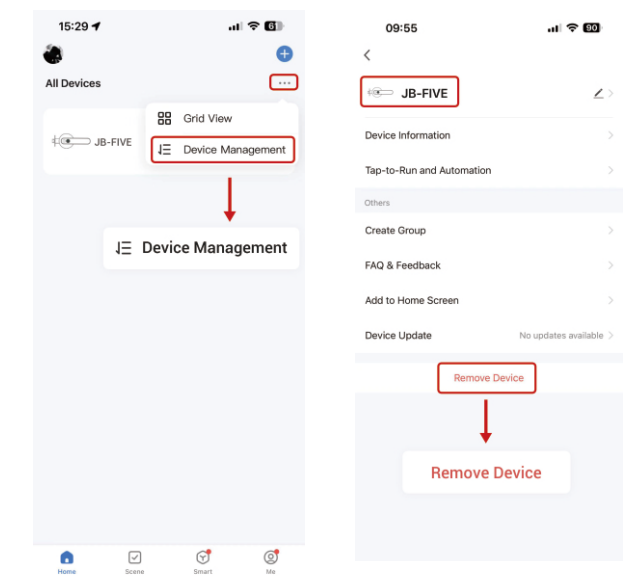
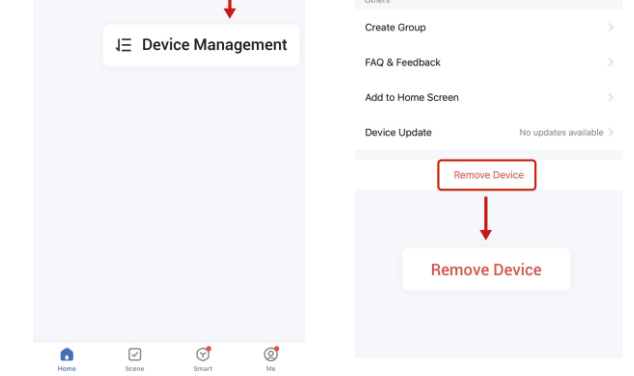
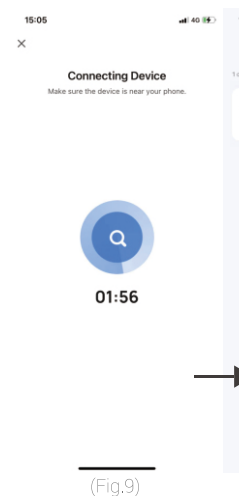
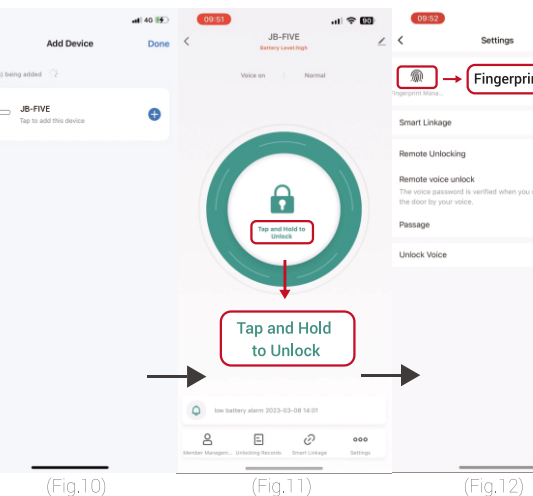
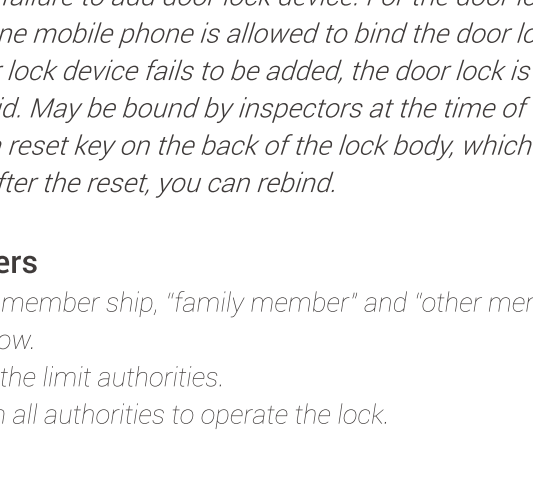
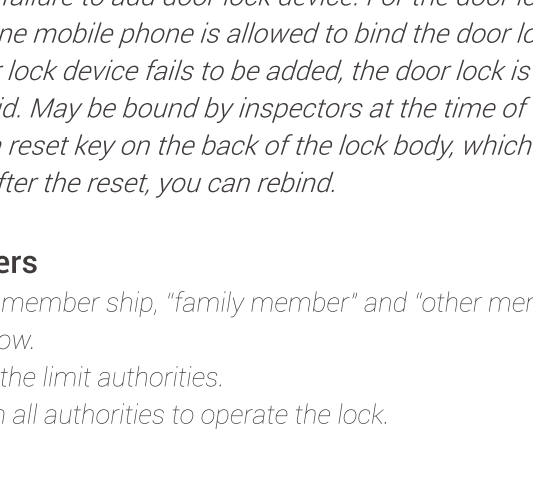


<p>1.Add "Other Member"</p> <p>▲<i>Note: This way to add "Family Member" is not recommended. For beginner of the SMART LIFT or TUYA APP, mainly for user to add "Other Member" (Fig.1,2,3)</i></p>    <p>(Fig.1) (Fig.2) (Fig.3)</p> <p>1.Add "Family Member"</p> <p>1.At the APP homepage, click "me", and choose "Home Management". (Fig.1)</p> <p>2.Choose a home or create a home.(Fig.2)</p> <p>3.Click "Add Member".(Fig.3)</p> <p>4.Choose a app to send notification to family member.(Fig.4)</p> <p>5.Family member will get a message about the invitation code.(Fig.5)</p> <p>6.Family members download the SMART LIFE APP, register and log in. Go to the interface, select "Home Management" and click "Join a Home" (Fig.6) (Note: Need to use the same app)</p> <p>7.Family member input invitation code, add a family member is finished. (Fig.7)</p>	<p>6.CONNECT GATEWAY</p> <p>If only Bluetooth is used, the phone and lock need to be connected for a short distance, beyond which they will automatically disconnect. If there is a gateway in the room, it can be used at a longer distance. (Setup the bluetooth gateway if user want to use the internet functions)</p> <p>▲ Note: Please use the bluetooth gateway provided in the box or sold separately in our store or any other Tuya core bluetooth gateway.</p> <p>(1)Step 1</p> <p>Turn on the WIFI and Bluetooth on mobile phone.(Fig.1)</p>   <p>(Fig.1) (Fig.2)</p> <p>(2)Step 2</p> <p>Activate the bluetooth gateway Power on the bluetooth gateway and hold the button on the back for 5s. Until the indicator light on the gateway turn to the blue and twinkle.(Fig.2)</p>	<p>7. HOW TO USE THE LOCK</p> <p>• 7.1 Fingerprint Unlocking: Setting by Fingerprint Management, hold the fingerprint area of the lock and place the same finger on the fingerprint area several times, holding the same position for more than 5 seconds each time. Hold down the fingerprint to delete or change it. (Fig.1,2,3,4,5,6)</p>    <p>(Fig.1) (Fig.2) (Fig.3)</p>    <p>(Fig.4) (Fig.5) (Fig.6)</p>	<p>• 7.6 Battery Information</p> <p>When the red light is on, the battery should be replaced with a new one within a week to ensure the lock works properly. The lock need to configure the four AAA+LR03+1.5V alkaline battery. In order to product for a longer time use for you. Please do not use other types of batteries, or do not mix old and new batteries.</p>  <p>power indicator</p> <p>(Note: This door lock is not equipped with USB charge for information security, please replace the battery in time when the red light is on, otherwise it will bring the risk of not being able to open the door. If the red light blinks four times, the battery is completely drained. The mechanical key is the only way to open in case the battery runs out. Please don't lock the mechanical key in the room.)</p> <p>Replace the Batteries: Remove the two screws shown in the picture with a screwdriver, take out the battery box, replace the old batteries according to the positive and negative marks of the battery. Then reinstall the batteries, and connect the voltage socket. The new batteries will ++ provide you with about one year's service.</p>	<p>FITNATE</p> <p>Programming and Installation Instruction</p>  <p>YL-56A</p>	<p>2.LOCK COMPONENTS</p>  <p>A : Outside knob B : Inside knob C : Latch assembly D : Power cable E : Mounting screw F : Battery cover G : Mounting screw H : Fingerprint collector I : Battery box J : Strike plate K : Wrought box</p>	<p>Step 5. Install Outside Knob</p> <p>Feed the power cable through latch and guide spindle through until outside rose sits flush.(Fig. 5)</p>  <p>(Fig.5)</p> <p>Step 6. Install Inside Knob</p> <p>Feed power cable through hole in knob and guide spindle into handle. (Fig.6a)</p> <p>Screw inside knob to outside knob using mounting screws. (Fig. 6b)</p>   <p>(Fig.6a) (Fig.6b)</p> <p>Step 7. Install the battery</p> <p>Install 4 pieces LR3 / 1.5V/ AAA alkaline batteries into the battery box, and install the + / -batteries in strict accordance with the arrow as shown in the figure. The wrong installing + / - battery will make the product unable to work, and will also lead to destructive malfunction.(Fig. 7)</p>  <p>(Fig.7)</p>	<p>5.SETTING UP WITH TUYA / SMART LIFE APP</p> <p>The product does not have password when it leaves factory, can input any fingerprint (optional) to unlock before it binds to the mobile phone's app. After the installation, please set up the lock according to the following instruction.</p> <p>5.1. Steps to set up with Tuya or Smart Life APP</p> <p>(1)Step 1 ---Search "SMART LIFE" or "TUYA SMART" APP download, register, and log in, Or by scan the below QR code to down load and installation. (Fig.1,2,3,4)</p>     <p>(Fig.1) (Fig.2) (Fig.3) (Fig.4)</p>	
   <p>(Fig.1) (Fig.2) (Fig.3)</p>   <p>(Fig.4) (Fig.5)</p>	<p>(3)Step 3</p> <p>Add the bluetooth gateway to the APP and connect the bluetooth gateway and the lock.</p>    <p>(Fig.1) (Fig.2) (Fig.3)</p> <p>•Choose your home, and add device(Fig.1)</p> <p>•Choose the bluetooth gateway, and input WIFI account and password.(Fig.2,3)</p>   <p>(Fig.4) (Fig.5)</p> <p>•User will see the bluetooth gateway is added successfully, and choose done.(Fig.4)</p>	<p>• 7.2 Key Unlocking</p> <p>Insert the key into the keyhole, rotate 180 degrees, and press down the handle to open the door. If the key cannot be rotated after inserting, the key does not match and the lock cannot be unlocked.</p>  <p>LED</p>  <p>Finger long press Tap and Hold to Unlock</p>	<p>• 7.7 Record of unlocking history</p> <p>To see the record of when the lock was opened and which user opened it. You can go to the lock page and click on "Unlocking Records" at the bottom of the page. All unlocking times and family member information is listed under unlocking records.(Fig.1,2.)</p>   <p>(Fig.1) (Fig.2)</p>	<p>TABLE OF CONTENT</p> <ol style="list-style-type: none">1. FEATURES 32. LOCK COMPONENTS 43. INSTALLATION INSTRUCTIONS 54. RESET THE LOCK TO FACTORY DEFAULT 85. SETTING UP WITH TUYA / SMART LIFE APP 105.1 STEPS TO SET UP WITH TUYA OR SMART LIFE APP 115.2 ADD MEMBERS 126. CONNECT WIFI (OPTIONAL) 167. HOW TO USE THE LOCK 197.1 FINGERPRINT UNLOCKING 197.2 KEY UNLOCKING 207.3 BLUETOOTH REMOTE UNLOCKING WITH MOBILE PHONE APP 207.4 PASSAGE MODE 217.5 TIP VOICE ON/OFF (SILENT MODE) 217.6 BATTERY INFORMATION 227.7 RECORD OF UNLOCKING HISTORY 23	<p>3.INSTALLATION INSTRUCTIONS</p> <p>▲ NOTE: We highly recommend watching the homepage video to installation.</p> <p>Step 1. Mark Door</p> <p>Using template, mark hole on both sides of door at required backset, then mark latch hole on door edge.(Fig.1)</p>  <p>Mark hole Latch Hole 32mm 48mm Side Hole</p> <p>Backset 2-3/8" or 2-3/4" 60x70mm 2-1/8" 54mm</p> <p>(Fig.1)</p> <p>Step 2. Drill Holes</p> <p>Bore a 2.13in hole on door face, then drill 0.98in hole in door edge to intersect with center of 2.13in hole.(Fig.2)</p>  <p>2.13in dia.hole 0.98in dia.hole</p> <p>(Fig.2) (Fig.3a)</p> <p>Step3. Install Latch</p> <p>Insert latch into hole and mark a line around edge of latch plate and remove latch. Chisel approx. 0.12in deep or until latch plate sits flush with door edge. (Fig.3a)</p>  <p>(Fig.3a)</p>	<p>Step 8. Install the battery cover</p> <p>a. Plug the power cord into the power socket as shown in the figure. b.Recycle the excess power cord into the hole. c.Install the battery cover in the orientation position and fasten 2 mounting screws. (Fig. 8)</p>  <p>Attention Direction Insert the power cord according to the arrow</p> <p>(Fig.8)</p> <p>4.RESET THE LOCK TO FACTORY DEFAULT</p> <p>1.Method 1 Press reset button</p> <p>As shown in the picture, the reset button is located in the small hole on the rear cover of battery. Press and hold the reset button for 5 seconds with something like a toothpick until ten beeps are heard. The product will be restored to factory Settings, put into debugging mode. All data are cleared, need to bind the phone again.</p>  <p>Reset key</p>	<p>(2)Step 2 ---Connect the lock to the mobile phone, SMART LIFE or TUYA APP with Bluetooth</p> <ul style="list-style-type: none">• Turn on the Bluetooth.(Fig.5)• Open the APP home page and select Add Device.(Fig.6)• Choose camera and lock, one of which is Lock(BLE), and choose enable Bluetooth network distribution.(Fig.7,8)    <p>(Fig.5) (Fig.6) (Fig.7)</p> <ul style="list-style-type: none">• Wait a while and the app will connect to the device. Make sure your device is close to your phone during this time. (Fig.9)• When the connection is successful, you will hear two beeps, and you will see a lock named "JB". When you tap into the main screen of the lock, you will see a green tap and hold to unlock key. (Fig.10,11)• You can set fingerprints to unlock it.(Fig.12)	
   <p>(Fig.1) (Fig.2) (Fig.3)</p> <p>2.Family members can upgrade other members into family members. (Fig.1,2,3)</p>    <p>(Fig.1) (Fig.2) (Fig.3)</p>	<p>• Select the ones that have been added wireless bluetooth gateway, click up Add existing and choose JB. Bluetooth gateway and lock complete connection.(Fig.5,6,7,8)</p>     <p>(Fig.5) (Fig.6) (Fig.7) (Fig.8)</p> <p>(4)Step 4</p> <ul style="list-style-type: none">• Connect to Alexa (The following websites are available for English translation) https://support.tuya.com/zh/help_detail/K9psi68xmng0• Quick Guide of Using Amazon Echo to Control Smart Devices https://developer.tuya.com/en/docs/iot/amazonechoguide?id=K9fyq88a3msw	<p>• 7.4 Passage Mode</p> <p>Note: After the passage mode is enabled, the lock will remain in the normally open state. When reading a fingerprint, the fingerprint collector indicator is pink.</p>    <p>(Fig.1) (Fig.2) (Fig.3)</p> <p>• 7.5 Tip Voice ON/OFF (Silent Mode),(Fig.1,2,3)</p>    <p>(Fig.1) (Fig.2) (Fig.3)</p>	<p>1.FEATURES</p> <ul style="list-style-type: none">• Can store up to 20 fingerprints for users• Support Tuya APP Bluetooth acceptance,can share users• Backlit keypad for use in low light• Mechanical key open• Deadlatch assembly with adjustable backset• DIY installation (instructions included)• Keyhole in front for more convenient use  <p>key</p> <p>Fingerprint collector</p>	<p>3</p>	<p>▲ Note: The latch length can be adjusted. As shown in the figure, hold the position of the latch square hole and pull it back horizontally to select 2.36in or 2.75in. (Fig.3b)</p>  <p>(Fig.3b)</p> <p>Insert latch then drill 0.8in x0.16in holes for mounting screws and fasten latch. (Fig. 3c)</p>  <p>(Fig.3c)</p> <p>Step4. Install Strike</p> <p>Close door and mark horizontal centre of latch on to door frame. Mark vertical line where door edge meets frame and measure in half of door thickness to find vertical centre. (Fig. 4a)</p> <p>Extend both lines until they intersect and drill a 0.98in hole to 0.6 in depth. Position strike plate and mark around edge. Chisel frame to approx 0.06in depth or until strike sits flush. Drill 0.8in x 0.16in screw holes and fix strike to frame. (Fig. 4b)</p>   <p>(Fig.4a) (Fig.4b)</p>	<p>2.Method 2 Reset with Smart life / Tuya APP</p> <p>User can reset the lock by removing the device on Smart Life or Tuya APP enter the Smart Life or Tuya home page, choose "...", and then click "Device Management". Last choose "Remove Device". (Fig.1, 2)</p>   <p>(Fig.1) (Fig.2)</p>	    <p>(Fig.9) (Fig.10) (Fig.11) (Fig.12)</p> <p>▲ Note: Solution of failure to add door lock device. For the door lock use safety, only one mobile phone is allowed to bind the door lock device. If the door lock device fails to be added, the door lock is proved to be invalid. May be bound by inspectors at the time of delivery. There is a reset key on the back of the lock body, which can be reset directly. After the reset, you can rebind.</p> <p>5.2. Add members</p> <p>There are 2 kinds of member ship, "family member" and "other member" can be added as below.</p> <p>Other Member: with the limit authorities.</p> <p>Family Member: with all authorities to operate the lock.</p>	<p>12</p>